Instructions for
8314T **Bentley**™ Carpet Wand

Dear Customer:

Congratulations on the purchase of your new Bentley™ Carpet Wand! The scene of the equipment world is becoming more high tech, and we at Mytee Products Inc. strive to keep you on the cutting edge with superior quality and technology.

With simple maintenance the Bentley™ Carpet Wand will give quality performance for many years to come. Keep in mind that neglect or abuse to the Bentley™ will cause unneccessary damage and void the warranty. If warranty questions arise, please get in touch with your distributor from whom you purchased this equipment.

Before first use of your new product, please read this manual thoroughly. Thank you for choosing Mytee!

Sincerely,
Mytee Products, Inc.

Parts & Service

Repairs, when required, should be performed by Mytee service personnel or a Mytee Authorized Service Center using original Mytee replacement parts and accessories. Please specify the Model and Serial Number when discussing your product. For a list of Authorized Mytee Service Centers, visit our website at www.mytee.com.

Pre-Operation

1. Vacuum and remove debris.
2. Pre-spray the area if desired.

Operation

1. Attach the vacuum and solution hoses to the wand.
2. Turn on the extractor. If using a heated extractor, be sure to prime the pump before turning on the heater.
3. Begin cleaning using a back-and-forth motion.We recommend one wet pass followed by two dry passes.
4. Adjust the solution flow as needed using the adjustable flow valve.

After Use

1. Squeeze the spray lever to clear any remaining solution from the hose line.
2. Store indoors. In a clean, dry place.
2. Do not expose to freezing conditions.

Maintenance

For opitmal perfmance, we recommend that you lubricate the bearing mechanism on the wand head monthly. To do this (refer to the Parts List section of this manual):
1. Remove swivel nut (Item #19).
2. Remove the swivel (Item #18) and use a rag to wipe off old grease.
3. Apply new, industrial grease to the swivel (Item #18) and bushing (Item #17).
4. Reinstall the swivel and swivel nut.

Troubleshooting


There is weak or no solution flow.
1. Check to make sure there is solution in your extractor.
2. Check to make sure that the flow valve is not closed.
3. Inspect the jets to make sure they are not clogged.

FAQs

Q: How much does the Bentley™ Wand weigh?
A: 8 lbs.


Q: Can I customize the Bentley™ Wand to my height?
A: Yes. Please read the instructions on the following page. **Please Note:** Miscut tubing cannot be replaced and will void tubing warranty.

8314T Bentley™ Features

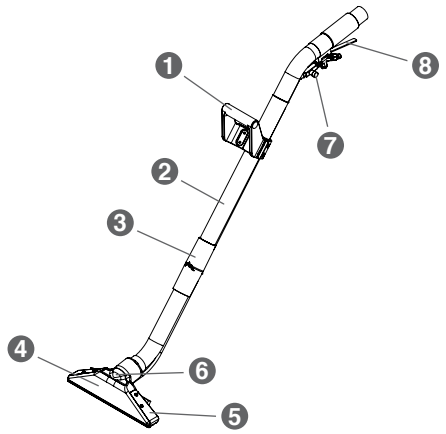


1. Comfort wand grip
2. 2” Titanium tube
3. Optional height adjustment coupler
4. Polished aluminum swivel head
5. Spray shields
6. Built-in sight window
7. Adjustable flow valve
8. FeatherTouch™ solution spray valve

Hooking up the Hoses

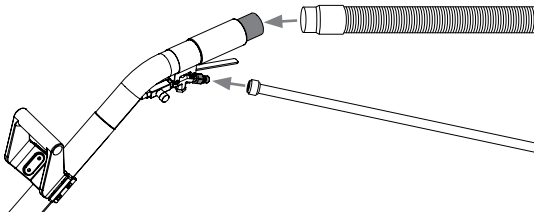

After the Vacuum Hose and Solution Hose are attached to the extractor, connect the Solution Hose to the Male Quick Disconnect, and the Vacuum Hose to wand tube.


Cleaning with the Bentley™

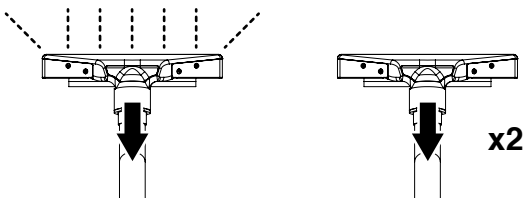

We recommend one wet pass followed by two dry passes. If using a heated extractor, this allows the machine to heat up more solution.


Size Adjustment Guide

Step 1

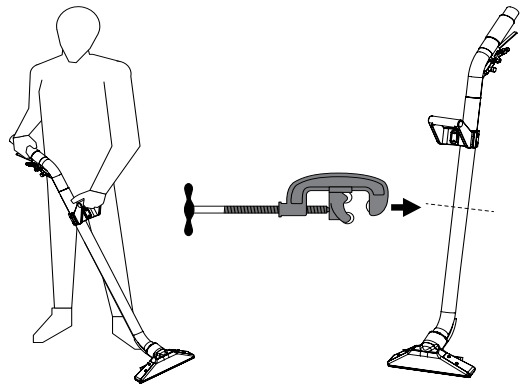


Try the wand for size to decide how much tubing you want to cut off. Proceed to cut the wand tube in half using a tube cutter tool.

Step 2

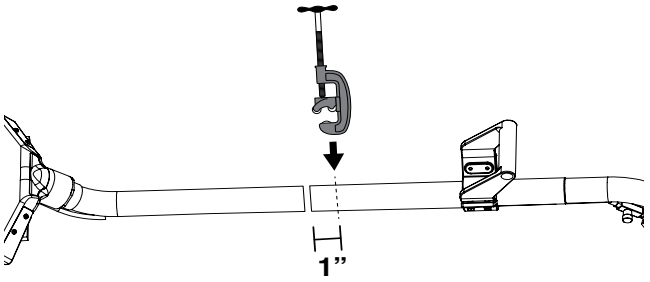


Begin to cut your wand to fit your height. **Cut the tubing in 1” increments** until you get the right size wand for you. **Remember: measure twice, cut once!**

Step 3

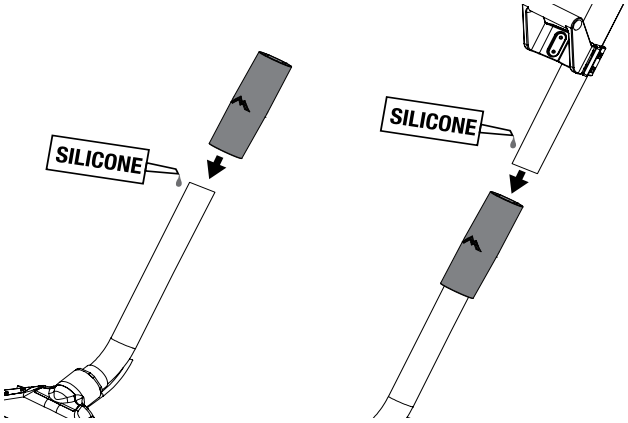

Once you find the right measurements for you, attach the tube coupler. Glue on the included coupler using either a 2-part epoxy (for a more permanent hold) or a silicone adhesive (which can be broken apart at a later date if desired). Use enough adhesive to provide an airtight seal and prevent suction loss.

Step 4

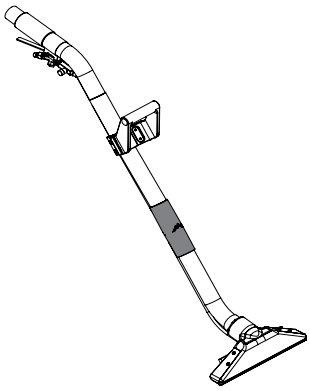

Allow the adhesive to dry completely before first use. Refer to the manufacturer’s instructions for drying times.

Wand Sizing Chart

The measurements in this chart are guidelines only. Keep in mind that people vary in height and arm length. We recommend cutting the tubing in 1” increments until you get the right size wand for you. **Important: Miscut tubing cannot be replaced and will void tubing warranty.**

Operator Height	Cut Tubing
5’8” - 5’10”	Cut off: Approx. 8”
5’10” - 6’1”	Cut off: Approx. 4”

Quick Tip: Solution Hose


After your wand has been resized, you can simply tie back any slack solution hose, or you can have the solution hose modified by a local hose company.

What should I use to cut the tubing?

Use a tubing cutter like the one pictured here. Refer to the tubing cutter’s manual for instructions on how to use.



Parts List & Pricing

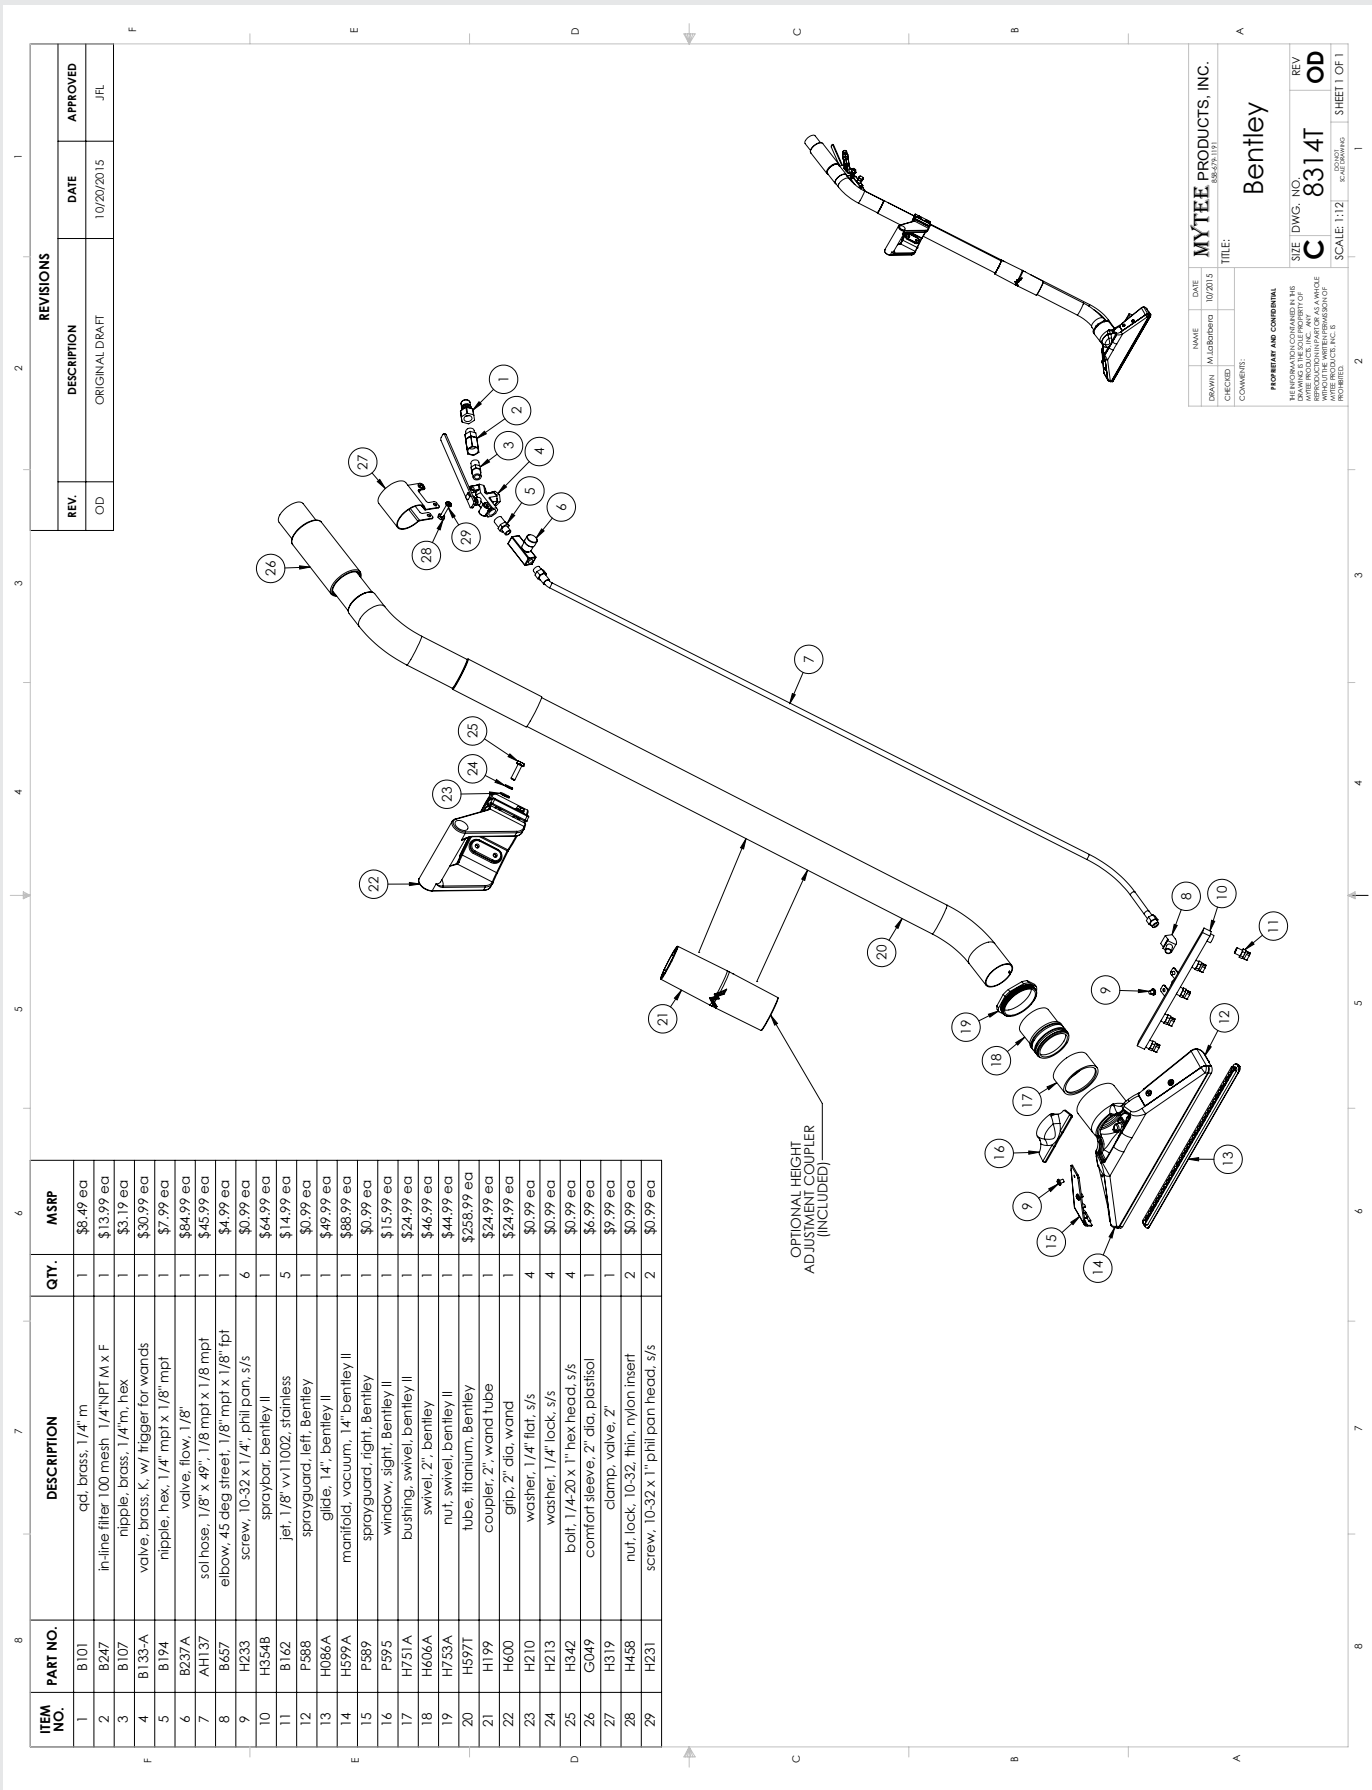

ITEM NO.	PART NO.	DESCRIPTION	QTY.	MSRP
1	B101	qd, brass, 1/4" m	1	$8.49 ea
2	B247	in-line filter 100 mesh, 1/4"NPT M x F	1	$13.99 ea
3	B107	nipple, brass, 1/4"m, hex	1	$3.19 ea
4	B133-A	valve, brass, K, w/ trigger for wands	1	$30.99 ea
5	B194	nipple, hex, 1/4" mpt x 1/8" mpt	1	$7.99 ea
6	B237A	valve, flow, 1/8"	1	$84.99 ea
7	AH137	sol hose, 1/8" x 49", 1/8 mpt x 1/8 mpt	1	$45.99 ea
8	B657	elbow, 45 deg street, 1/8" mpt x 1/8" fpt	1	$4.99 ea
9	H233	screw, 10-32 x 1/4", phil pan, s/s	6	$0.99 ea
10	H354B	spraybar, bentley II	1	$64.99 ea
11	B162	jet, 1/8" vv1102, stainless	5	$14.99 ea
12	P588	sprayguard, left, Bentley	1	$0.99 ea
13	H086A	glide, 14", bentley II	1	$49.99 ea
14	H599A	manifold, vacuum, 14" bentley II	1	$88.99 ea
15	P589	sprayguard, right, Bentley	1	$0.99 ea
16	P595	window, sight, Bentley II	1	$15.99 ea
17	H751A	bushing, swivel, bentley II	1	$24.99 ea
18	H606A	swivel, 2", bentley	1	$46.99 ea
19	H753A	nut, swivel, bentley II	1	$44.99 ea
20	H597T	tube, titanium, Bentley	1	$258.99 ea
21	H199	coupler, 2", wand tube	1	$24.99 ea
22	H600	grip, 2" dia, wand	1	$24.99 ea
23	H210	washer, 1/4" flat, s/s	4	$0.99 ea
24	H213	washer, 1/4" lock, s/s	4	$0.99 ea
25	H342	bolt, 1/4-20 x 1" hex head, s/s	4	$0.99 ea
26	G049	comfort sleeve, 2" dia, plastisol	1	$6.99 ea
27	H319	clamp, valve, 2"	1	$9.99 ea
28	H458	nut, lock, 10-32, thin, nylon insert	2	$0.99 ea
29	H231	screw, 10-32 x 1" phil pan head, s/s	2	$0.99 ea