
Instructions for
8400DX Mytee Dry™

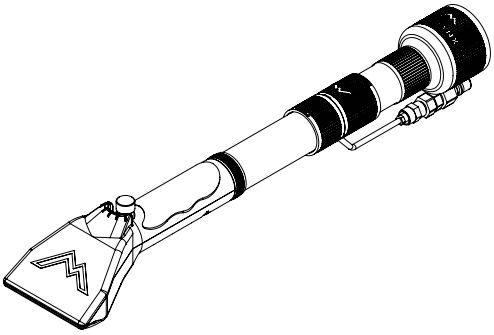

ATTACHING THE MYTEE DRY™ TO YOUR EXTRACTOR

If you are attaching the tool to a Mytee® extractor, simply use the Cuff-Lynx™ fitting which is installed at the end of the hose. Twist on to the male Cuff-Lynx™ on your extractor.

If you are using with a vinyl cuff, you will need to remove the Cuff-Lynx™ fitting from the vacuum hose and install the vinyl cuff and barb fitting (part # H655) which is included. To do this, turn the Cuff-Lynx™ clockwise to remove, and install the vinyl cuff by turning counter-clockwise.

SETTING THE FLOW RATE ON THE MYTEE DRY™

Set the PSI on your extractor at the normal PSI you would use for carpet cleaning.

With the PSI set and the vacuums on, use the brass knob on the Mytee Dry™ to adjust the flow. You want to adjust it to the point where you are getting a full stream across the tool, but the water is contained in the Mytee Dry's™ chamber by the vacuum recovery.

To conserve water, shut off the flow when not in use by turning the knob all the way clockwise.

CLEANING

Use long, even strokes across the fiber. It shouldn't be necessary to make dry passes. If an area does not come clean after the first pass, try making another pass from a different direction to get the other faces of the fiber.